



for roller conveyors



PU plus Poly-V belts PJ

elastic Poly-V-belt for roller conveyors

BEST CHARACTERISTICS

Elastic BEHAbelt PUplus Poly-V belts PJ offer a powerful power transmission for linear and curved conveyors in the light load range up to approx. 50 kg.

The special PUplus material mixture ensures optimum compromise between tensile strength and elasticity.

REDUCTION OF THE RISK OF INJURY

- in case of belt retraction during operation.
- when replacing the belt, thanks to the force-saving assembly.

ADVANTAGES


For installation / belt replacement

- Thanks to its elasticity, installation and belt replacement are easy and time-saving.
- Each length can be produced independently on site with a welding paddle and guide clamp.
- On request we offer the fabrication of endless belts.

In system design

- Weldable belts by the roll for individual lengths
- better running behaviour in conveyor curves (inclined run-in).
- The orange, softer version is designed for use in deep-freeze and low temperature areas.
- Further material versions possible (e.g. softer, harder).

Clamping force for safety elongation* of 20 mm

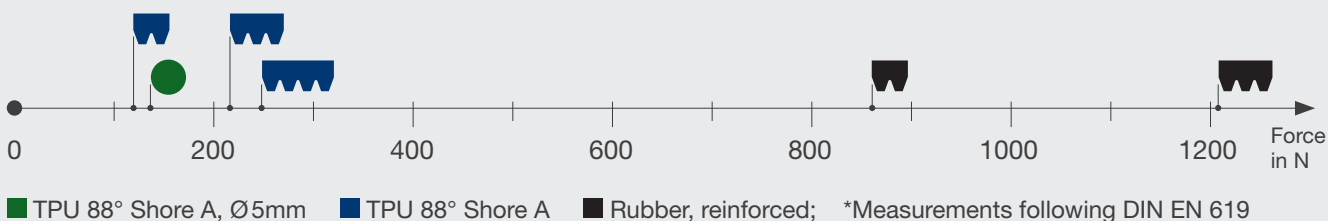

Give us a call! We will be happy to advise you.
+49 7684 9070

PU85A plus Poly-V belt, ultramarine blue

Standard version



Order No.	Design	Description	Profile dimension mm	approx. Weight kg/100m	Standard roll		Recommended Min. pulley Ø		Fmax/belt (Standard)	
					m	ft	mm	inch	kg	lbs
FBPVKJ2L		PJ2	4,8 x 4	1,96	200	656	40	1,6	10,3	22,7
FBPVKJ3L		PJ3	7 x 4	2,93	200	656	40	1,6	15,0	33,1
FBPVKJ4L		PJ4	9,3 x 4	3,92	200	656	40	1,6	20,6	45,4

approx. 88° Shore A

Recommended pretension: 3...6 %, **Coeff. of friction μ** : Steel: approx. 0,60 | PE: approx. 0,30 | HDPE: approx. 0,25

PU75A plus Poly-V belt, orange

Design especially for deep-freeze and low temperature areas



Order No.	Design	Description	Profile dimension mm	approx. Weight kg/100m	Standard roll		Recommended Min. pulley Ø		Fmax/belt (Standard)	
					m	ft	mm	inch	kg	lbs
FBVIPJ20		PJ2	4,8 x 4	1,96	200	656	30	1,2	7,2	15,8
FBVIPJ30		PJ3	7 x 4	2,93	200	656	30	1,2	10,5	23,1
FBVIPJ40		PJ4	9,3 x 4	3,92	200	656	30	1,2	14,4	31,7

approx. 80° Shore A

Recommended pretension: 3...6 %, **Coeff. of friction μ** : Steel: approx. 0,70 | PE: approx. 0,40 | HDPE: approx. 0,35

Technical notes

Recommended pretension: approx. 3...6%


Note on the change from rubber to PU: when converting from classic rubber Poly-V belts to PUplus material, the production length must be reduced by 5% of the original nominal dimension.

Weldable belts
by the roll
for individual lengths



Welding tool EErgo 60 with guide clamp FZ01 Vario

Join Poly-V belts quickly and easily to the required length. With the FZ01 Vario guide clamp and the replaceable profile jaws, the belt ends are positioned precisely before welding. The specially developed welding tool EErgo 60 is ready for use in less than 5 minutes and ensures best welding results with constant temperature.



Exchangeable profiled jaws

FZ01 Vario with quick release for inserting the belts and automatic, constant contact pressure.

EErgo 60 is a specially developed welding tool with fast heat-up time, ergonomic working position and constant welding temperature.

