



HS400 & 800

Heating paddle with joining table

WELDING TECHNOLOGY FOR ELASTIC MONOLITHIC BELTS

Elastic monolithic PU conveyor belts from BEHAbelt offer new fabrication possibilities. Due to the lack of traction layers joining by finger welding is no longer necessary, as the monolithic belt has a homogeneous design - even in the weld seam.

The welding device HS from BEHAbelt is a simple, handy, reliable and cost-effective tool for butt joining of monolithic belts. Depending on customer requirements, two versions are available with the joining table and heating paddle for max. belt widths up to 400 and up to 800 mm.

The simple operation in combination with the intuitive handling of the tool enables a repeatable and high-quality connection of the belts.

Optional adapter plates ensure precise positioning and clamping of the butt ends to be welded.





HS 400 & 800 – HEATING PADDLE WITH JOINING TABLE


- HS400 for up to 400 mm belt width
- HS800 for up to 800 mm belt width
- Sophisticated design with positioning aids and stoppers ensures highly repeatable accuracy of weldings
- Very short heating time
- Clamping lever with locking device
- Robust and handy design of the individual components
- Exact temperature adjustment via control unit
- No adhesion of PU or TPE material due to Teflon-coated heating paddle
- Easy cleaning of the heating blade with a cotton cloth
- Welding unit delivered in a mobile, stable transport box for easy use on site




For optimum alignment and clamping of the belts to be welded in the joining table, optional adapter plates for more complex structures are available (not included in the standard product range).




Locking pins ensure the correct positioning of the adapter plates on the joining table.

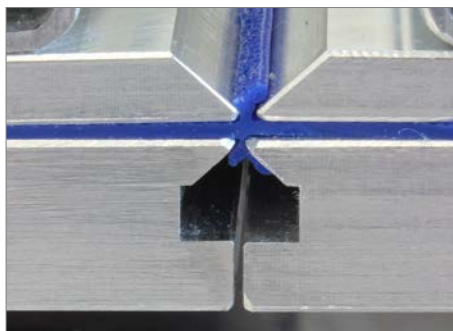

Clamping bars with chamfer for optimum shaping of the welding bead

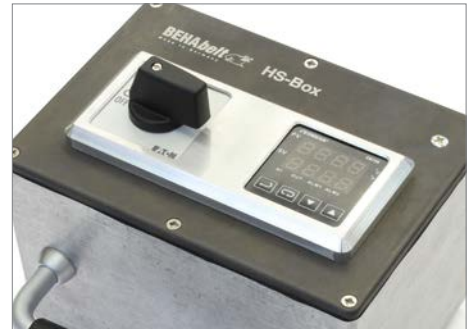


Robust and easy to use control unit for temperature control

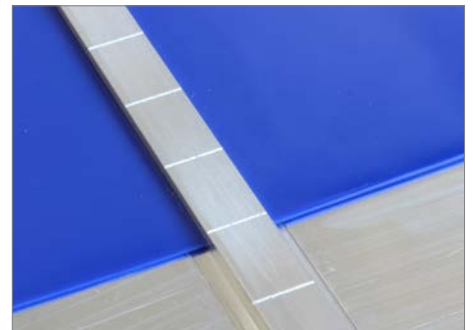

Precise and aligned insertion of the belt ends.



Welding stop for repeatable welds

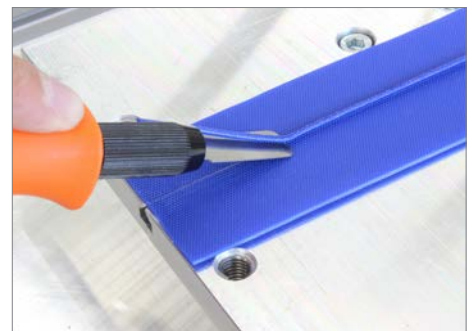

Easy removal of the welding bead with the supplied tool